INDUSTEK

STATIONARY COMPACTOR

FKO.4

FUNCTION

REDUCE THE FREQUENCY COLLECTIONS OF YOUR DRY MATERIALS

BENEFITS

- Reduces the amount of transported waste
- Minimizes handling time
- Lowers transportation costs
- Clean, well-kept facilities promote good-neighborliness
- Reduces fire risks
- Decreases transport-related greenhouse gas emissions
- Meets the expectations of your eco-friendly employees and clients
- Enhancement of environmental awareness and responsibility improves corporate image

STATIONARY COMPACTOR

FKO.4

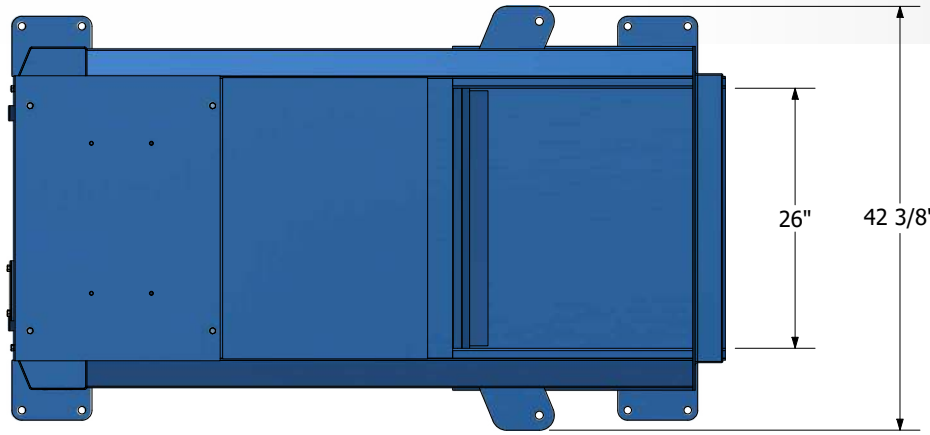

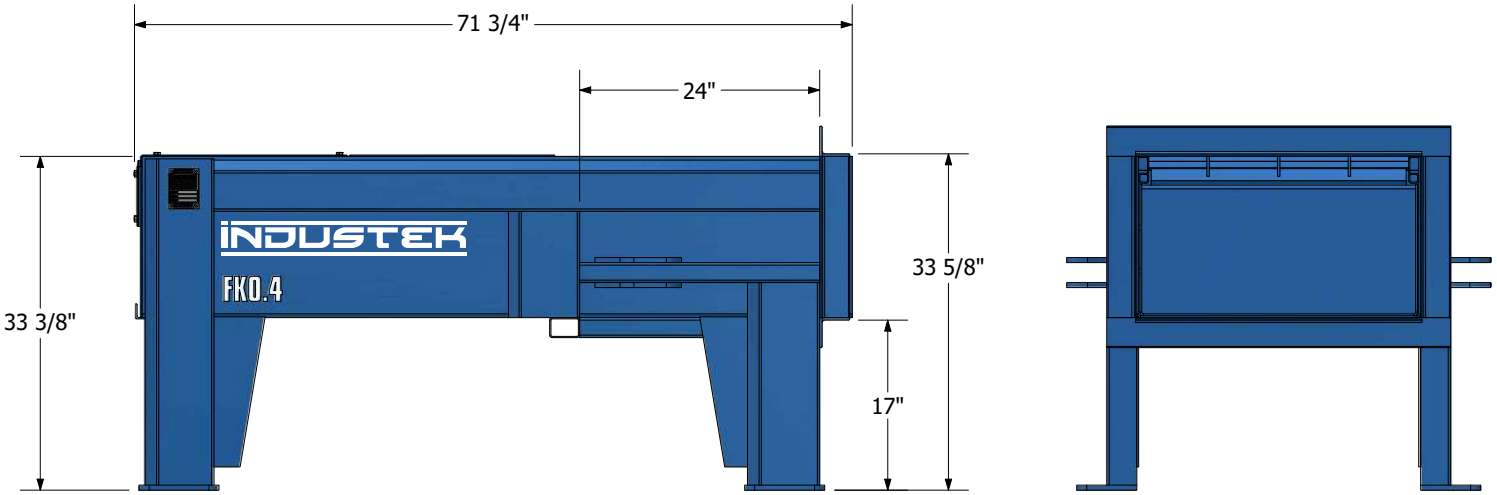

C US

ANSI

MADE IN CANADA
FABRIQUÉ AU CANADA

Compaction chamber volume	0.4 yd³
Unit weight	950 lb
Motor	3 Hp 1800 rpm 600 v
Pump	3 GPM
Operating pressure	1 800 psi
Maximum pressure	2 100 psi
Penetration	8''

Cycle time
36 sec

Feed opening
26'' x 24''

Waste type
Dry

Industek reserves the right to update or modify some of the specifications included in this document, in order to improve product performance.