INDUSTEK
BALERS & COMPACTORS

# CROSSED-CYLINDER STATIONARY COMPACTOR

FX2.0

## FONCTION

**REDUCE THE FREQUENCY COLLECTIONS OF YOUR DRY MATERIALS**

## BENEFITS

- Reduces the amount of transported waste
- Minimizes handling time
- Lowers transportation costs
- Clean, well-kept facilities promote good-neighborliness
- Reduces fire risks
- Decreases transport-related greenhouse gas emissions
- Meets the expectations of your eco-friendly employees and clients
- Enhancement of environmental awareness and responsibility improves corporate image

# CROSSED-CYLINDER STATIONARY COMPACTOR

FX2.0

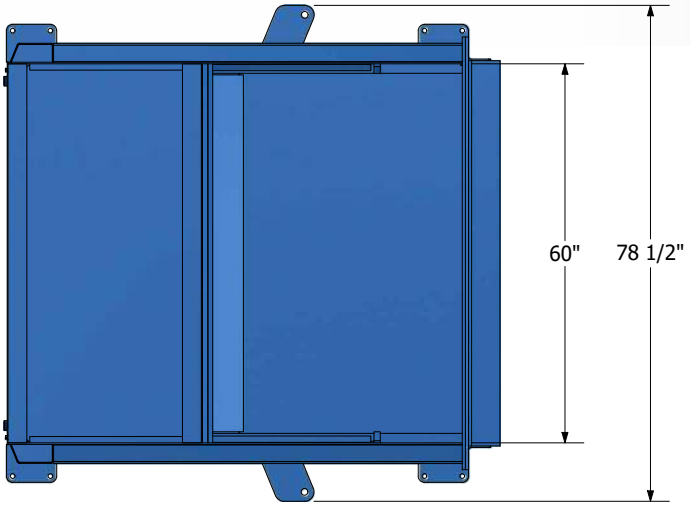


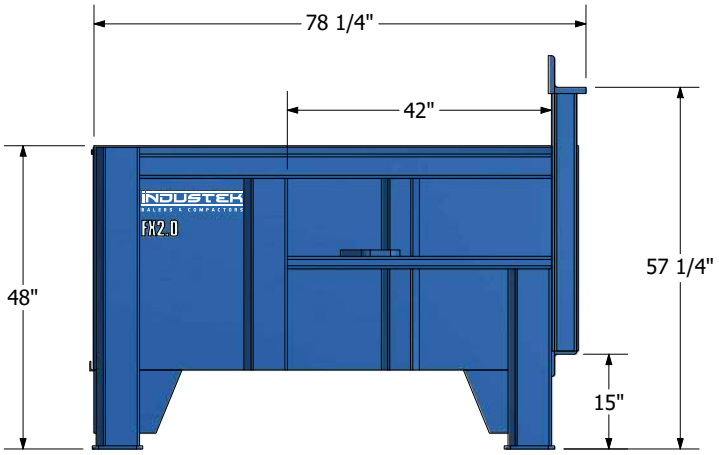


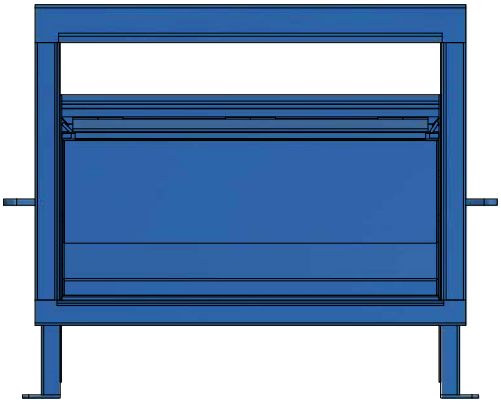

| | |
|---|---|
| Compaction chamber volume | 2 yd³ |
| Unit weight | 3 900 lb |
| Motor | 10 Hp 1800 rpm 600 v |
| Pump | 9 GPM |
| Operating pressure | 1 800 psi |
| Maximum pressure | 2 100 psi |
| Penetration | 8'' |

**Cycle time**
52 sec

**Feed opening**
60'' x 42''

**Waste type**
Dry

Industek reserves the right to update or modify some of the specifications included in this document, in order to improve product performance.