DUAL VERTICAL BALER

IBV1320D

FUNCTION

BALING OF YOUR RECYCLABLE MATERIALS

- CARDBOARD
- PLASTIC
- METAL
- ETC.

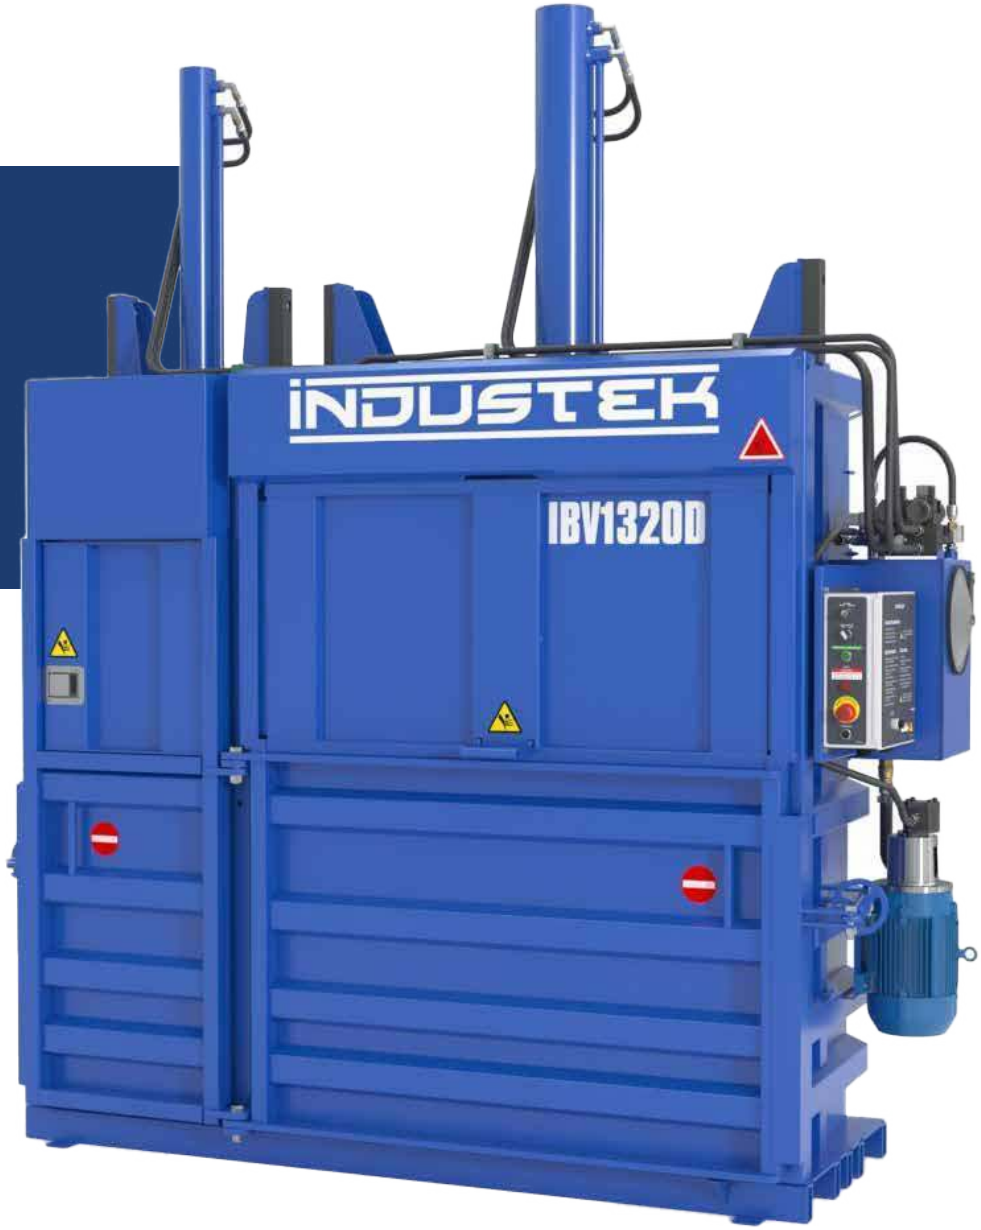

BENEFITS

- Reduces the amount of transported waste
- Minimizes handling time
- Lowers transportation costs
- Clean, well-kept facilities promote good-neighborliness
- Reduces fire risks
- Decreases transport-related greenhouse gas emissions
- Meets the expectations of your eco-friendly employees and clients
- Enhancement of environmental awareness

DUAL VERTICAL BALER

IBV1320D

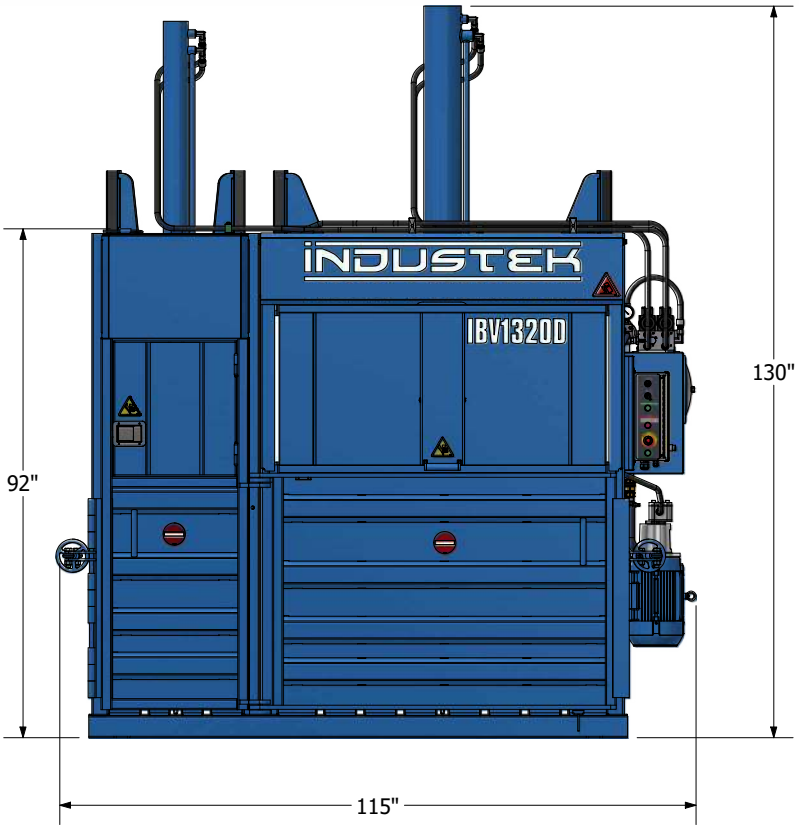

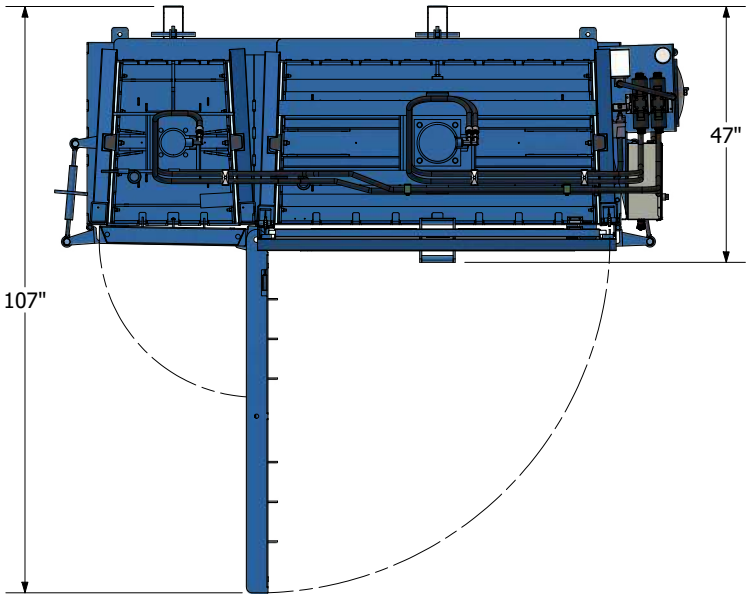

Unit overall dimensions	115” W x 47” D x 130” H	
Unit weight	5 700 lb	
Motor	10 Hp 1800 rpm 600 v	
Pump	9 GPM	
Operating pressure	1 800 psi	
Maximum pressure	2 100 psi	
	LARGE CHAMBER	SMALL CHAMBER
Maximum force	59 400 lb	26 400 lb
Operating force	50 900 lb	22 600 lb
Ram pressure	28 psi	37 psi

Cycle time
LC : 58 sec | SC : 26 sec

Feed opening
LC : 60’’ x 25’’ | SC : 24’’ x 25’’

Bale size
LC : 60’’ W x 30’’ D x 42’’ H
SC : 24’’ W x 30’’ D x 42’’ H

Bale approximate weight of cardboard
GS : 1 000 lb | PS : 375 lb

Waste type
Cardboard and plastic

LC = Large chamber
SC = Small chamber

Industek reserves the right to update or modify some of the specifications included in this document, in order to improve product performance.