INDUSTEK
BALERS & COMPACTORS

SELF-CONTAINED COMPACTOR

IX2.0-34

FUNCTION

REDUCE THE FREQUENCY COLLECTIONS OF YOUR DRY AND/OR WET MATERIALS

BENEFITS

- Reduces the amount of transported waste
- Minimizes handling time
- Lowers transportation costs
- Clean, well-kept facilities promote good-neighborliness
- Reduces fire risks
- Decreases transport-related greenhouse gas emissions
- Meets the expectations of your eco-friendly employees and clients
- Enhancement of environmental awareness and responsibility improves corporate image

SELF-CONTAINED COMPACTOR

IX2.0-34

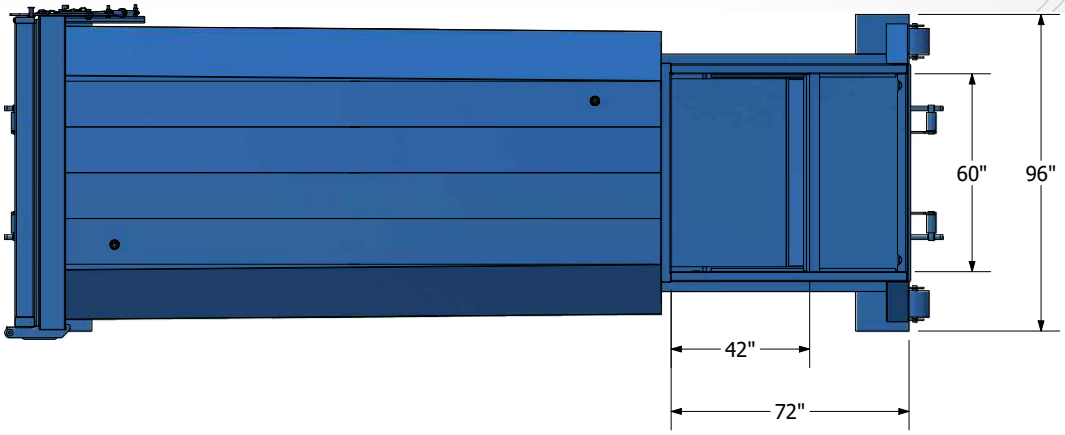

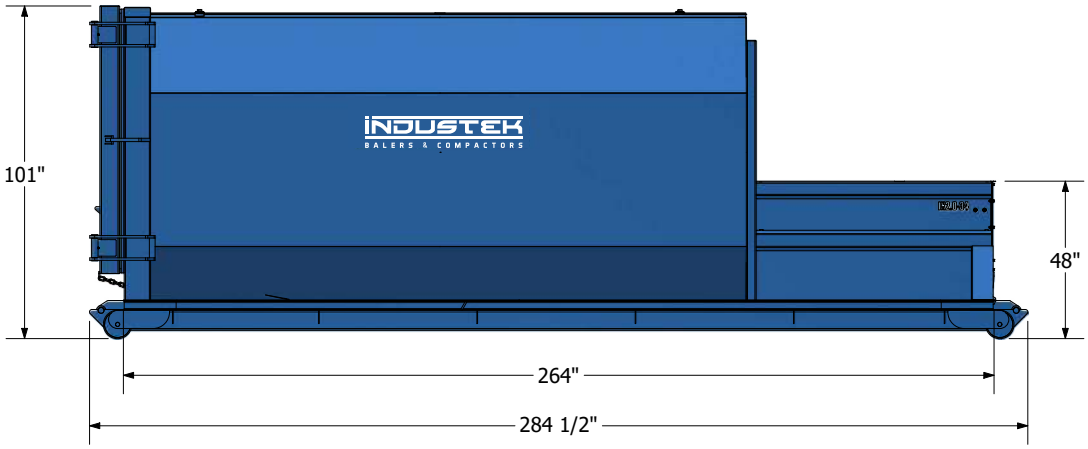

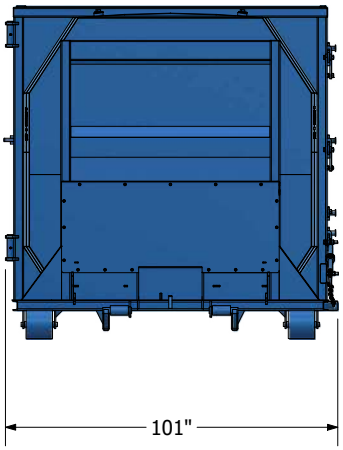

C US

ANSI

MADE IN CANADA
FABRIQUÉ AU CANADA

Compaction chamber volume	2 yd³
Container volume	34 yd³
Unit weight	9 700 lb
Motor	10 Hp 1800 rpm 600 v
Pump	9 GPM
Operating pressure	1 800 psi
Maximum pressure	2 100 psi
Penetration	10''

Cycle time
52 sec

Feed opening
60'' x 42''

Waste type
Dry or wet

Industek reserves the right to update or modify some of the specifications included in this document, in order to improve product performance.