INDUSTEK
BALERS & COMPACTORS

MINI SELF-CONTAINED COMPACTOR

MIK6

FUNCTION

UNIQUE COMPACTOR DESIGNED TO REDUCE THE FREQUENCY OF COLLECTIONS OF YOUR DRY AND/OR WET MATERIALS.

BENEFITS

- No leakage
- Reduces collecting cost
- Uses minimal floor space
- Indoor use: garage, warehouse
- Outdoor use: open or fenced-in spaces, parking lots
- Gravity-operated opening latch
- 3-hour or less installation time
- Safe operating area
- High output compaction
- Wind-resistant design allows waste to stay put
- Deters scavengers and insects
- Reduces fire risks
- Low-maintenance

MINI SELF-CONTAINED COMPACTOR

MIK6

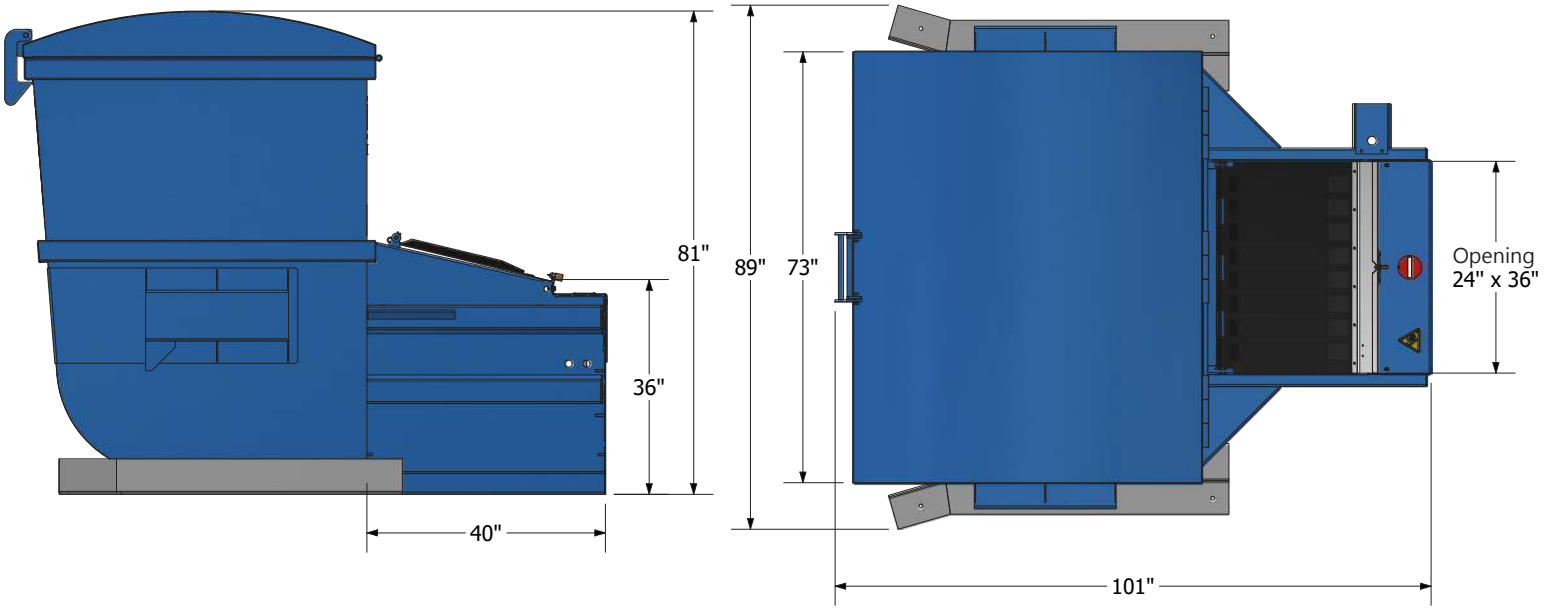

Volume of the compaction chamber	0,4 yd
Container section	6 yd
Weight	2 250 lb
Motor	3 Hp 1800 rpm 208/230/430/600v 3-phase
Pump	3 GPM
Operating pressure	1 800 psi
Maximum pressure	2 100 psi
Ram penetration	6''

Cycle time
33 sec

Feed opening
24'' x 36''

Waste type
Dry and/or wet waste

Industek reserves the right to update or modify some of the specifications included in this document, in order to improve product performance.